






未注公差/General tolerances(mm)												0.1/1.0 ±Z		
0	>3	~5	>10	>18	>30	>50	>80	>120	>180	>250	>315		>400	>500
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~
3	6	10	18	30	50	80	120	180	250	315	400	500	>500	0.1/1.0
±0.12	±0.18	±0.22	±0.28	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±Z

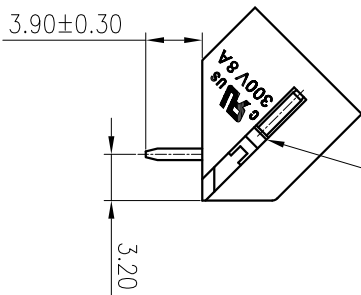

View V

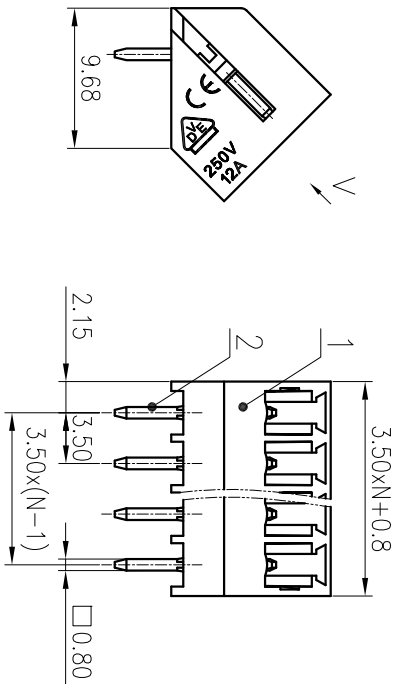

ITEM	NAME OF PART	MATERIAL	NOTES
2	Pin	Copper Alloy	Sn Plated
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/8	/	300/8
IEC 标准/IEC Standard:	/	/	/
过压类别/Overvoltage Category/污染等级/Pollution Degree	II/2		
额定电压/电流/Rated Voltage(V)/Current(A)	250/12		
额定脉冲电压(kV)/Rate Impulse Voltage(kV)	2.5		
间距/Pitch(mm)/线数范围/Poles	3.81/N=02~24P		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: Lon CHH 2020.05.23

CHKD: Yu JZh 2020.05.23

DRFT: YZ 2015.10.12

DEGSON 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: 15EDGLC-3.5-XXP-1Y-00A(H)

DRAWING NO.: 15EDGLC-3.5-C01

TYPE: CUSTOMER DRAWING

SCALE: 2:1

D

C

B

A


D

C

B

A

PCB LAYOUT

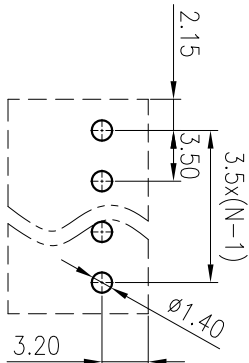

REV	ECN	DESCRIPTION	DRFT	DATE
1	2	3	4	5

SIZE	SIZE	UNIT
A4	mm	inch

TYPE	SCALE	REV	T1
CUSTOMER DRAWING	2:1	1/1	1/1