
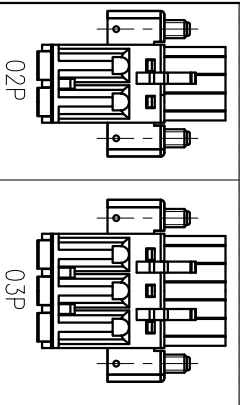
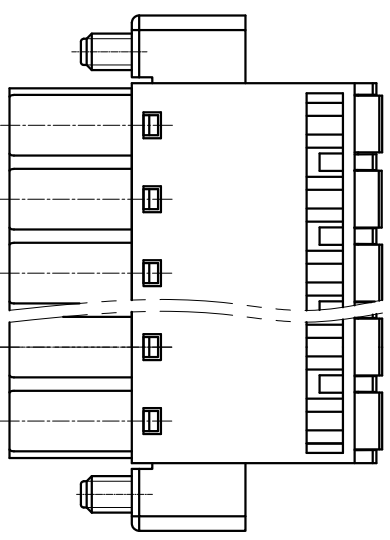
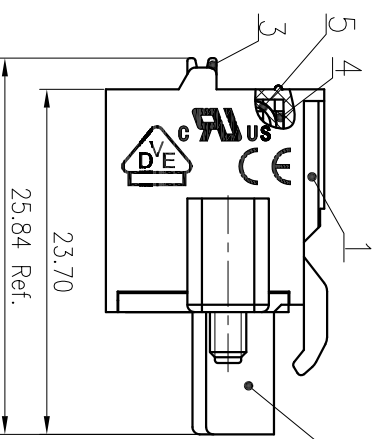
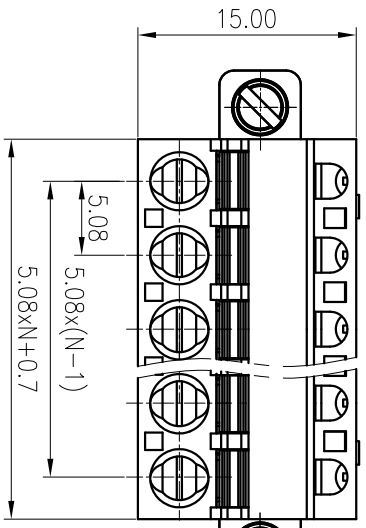
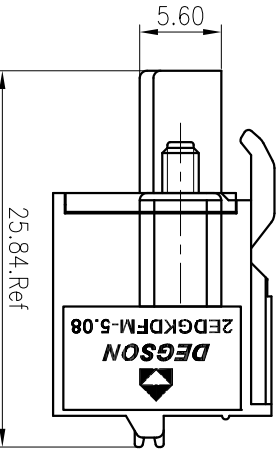


02P:Clasp on the left from this view

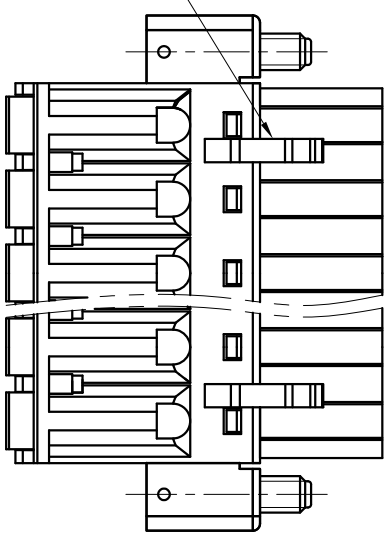

6	Screw	Steel	Zn Plated
5	Spring	Stainless steel	
4	Clamp	Copper Alloy	Sn Plated
3	Button	PA66	UL94V-0
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

UL 标准 / UL Standard:	B	C	D
额定电压/电流 / Rated Voltage(V)/Current(A)	300/10	/	300/10
IEC 标准 / IEC Standard:			
过压类别 / Overvoltage Category / 污染等级 / Pollution Degree	III/2		
额定电压/电流 / Rated Voltage(V)/Current(A)	320/20		
额定脉冲电压(KV) / Rate Impulse Voltage(KV)	4.0		
线径范围(硬线和软线) / Wire Range(rigid and flexible)(mm <sup>2</sup> / AWG)	0.2~2.5 / 26~12		
间距 / Pitch(mm) / 线数范围 / Poles	5.08 / 02~24P		
剥线长度 / Stripping length(mm)	9~10		
使用温度范围 / Operating Temperature(°C)	-40~+105		
符合RoHS环保要求 / Conform to RoHS	Yes		
标准颜色编号 / Standard color number:	PANTONE / RAL		

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: LIQL 2020.06.13

CHKD: MdEK 2020.06.13

DFTT: HXG 2009.02.16

NAME: 宁波高松电子有限公司  
NINGBO DEGSON ELECTRICAL CO., LTD

2EDGKDFM-5.08-XXP-1Y-00A(H)

DRAWING NO.: 2EDGKDFM-5.08-C01

TYPE: CUSTOMER DRAWING SCALE: 2:1 SHEET 1/1

REV	ECN	DESCRIPTION	DFTT	DATE