
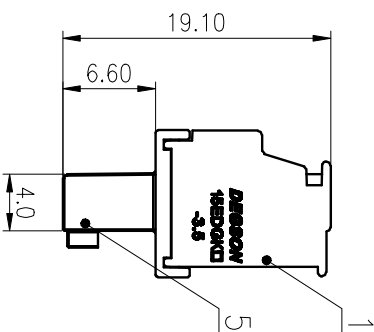
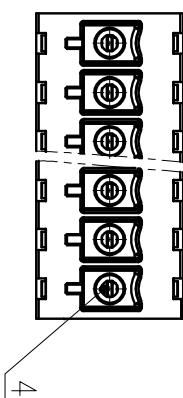
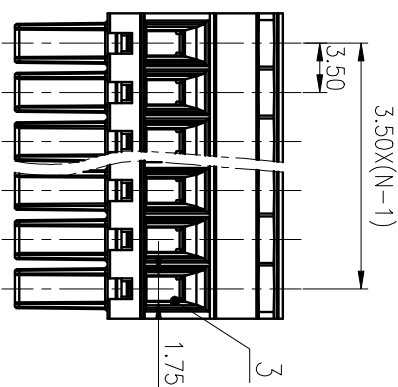



公差等级/General Tolerances(mm)		公差等级/General Tolerances(mm)										公差等级/General Tolerances(mm)		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>280	>315	>400	>500	0.1/1/0
~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±Z

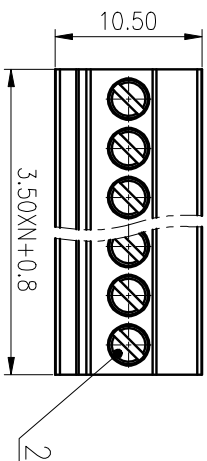

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
2	Screw	Steel	M2/Zn Plated
3	Cage	Copper Alloy	M2/Ni Plated
4	Clamp	Copper Alloy	Sn Plated
5	Cover	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/8	/	300/8
IEC 标准/IEC Standard:	II/2		
过压类别/Overvoltage Category/污染等级	II/2		
污染度/Pollution Degree	250/7		
额定电压/电涌/Rated Voltage(V)/Current(A)	2.5		
额定脉冲电压(kV)/Rate Impulse Voltage(kV)	M2, 0.2/1.77		
额定扭矩/Torque Tightening(N·m/Lbin)	0.5~1.5/28~16		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	3.5/N=02~24P		
间距/Pitch(mm)/线数范围/Poles	6~7		
剥线长度/Stripping length(mm)	-40~+105		
使用温度范围/Operating temperature(°C)	Yes		
符合RoHS要求/Conform to RoHS	Yes		

MATERIAL: SURFACE:

MAT NO.:	/	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD
STATUS:	/	
APPD:	Lan CHH 2020.05.27	NAME:
CHKD:	Yu JZh 2020.05.27	15EDGKB-3.5-XXP-1Y-100A(H)
DFT:	Cenk 2020.05.27	DRAWING NO.:
		10002159
		TYPE: CUSTOMER DRAWING
		SCALE: 2:1
		REV
		T0

REV	ECN	DESCRIPTION	DFT	DATE
1				
2				
3				
4				

