





REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

Technical characteristics:
 Specifications
 DIN EN 60 664
 DIN EN 61 984

Inserts

01. Number of contacts : 2
02. Rated Current : 70A
03. Rated Voltage : 1000V
04. Pollution degree : 3
05. Rated impulse voltage : 8kV¹⁰
06. Insulation resistance : $\geq 10^9\Omega$
07. Material : Polycarbonate
08. Rated voltage acc. to UL : 600V
09. Limiting temperatures : -40°C~+125°C
10. Flammability acc. to UL94 : V0
11. Mechanical working life (mating cycles) : ≥ 500

- Contacts
01. Material: Copper alloy
 02. Surface: hard-silver plated
 03. Contact resistance : 0.5m Ω
 04. Terminal : Axial screw terminal
 05. Wire gauge : 6-16mm² (AWG 10-6)
 06. Hexagonal driver: SW2.5
 07. Stripping length : 11mm
 08. Tightening torque : 2-4Nm
 09. Rohs Compliance

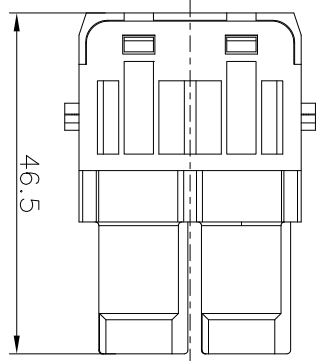

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON [®] NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:		TITLE:	CUSTOMER DRAWING
CHKD:		REV	DO-1
DRFT:	YANG 2016.08.22	SHEET	1/1
THIRD ANGLE PROJECTION		DRAWING NO.:	DO NOT SCALE DRAWING
		SCALE	

A 8 7 6 5 4 3 2 1