



REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

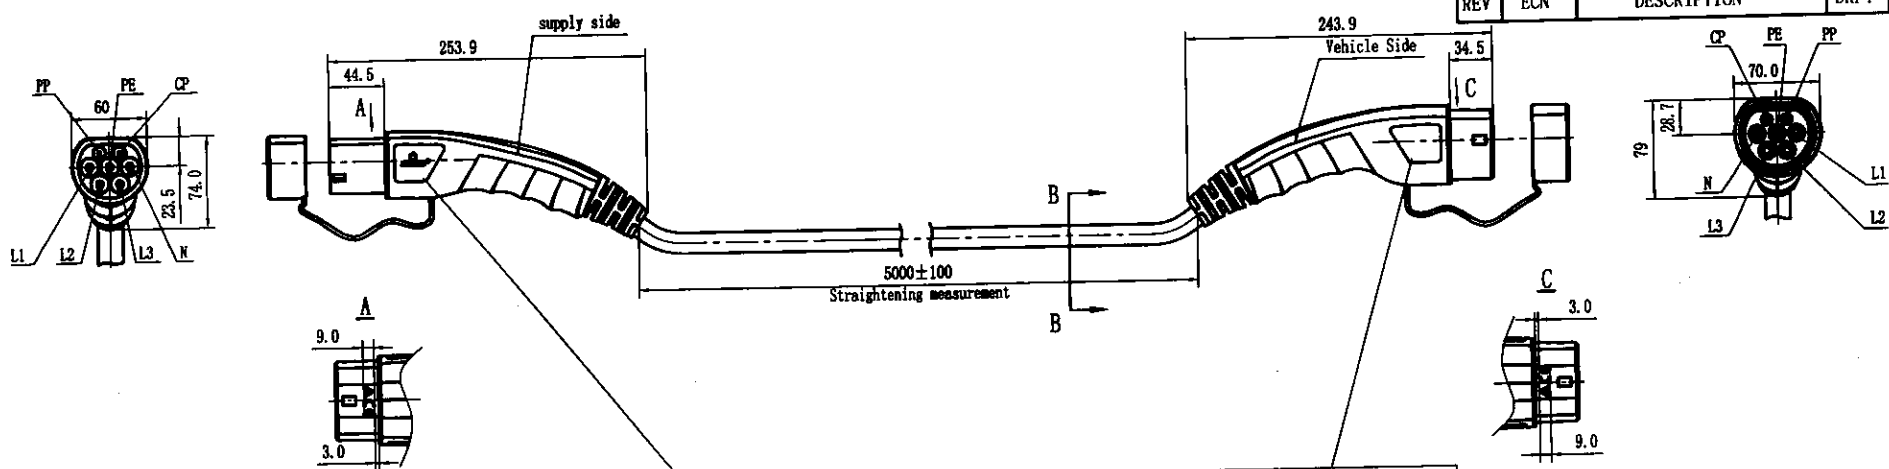

Wiring diagram

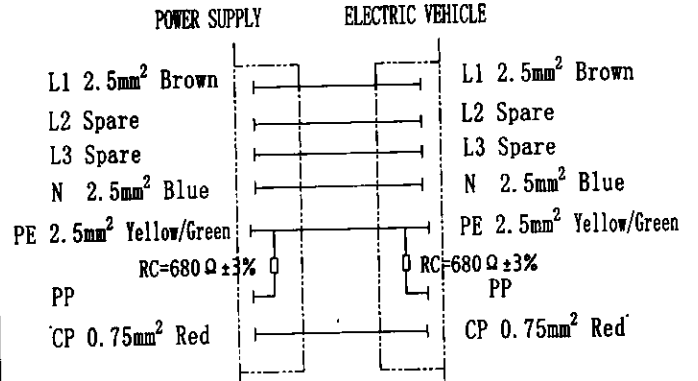

Laser Printing Front Note:


Laser Printing Back Note(Arial):

MEAC-S-016A-P1-03-5.0M-30AH
16A 250V AC
IEC 62196-2:2016
IP54
201xxxxx-xxxx

Laser Printing Front Note(Arial):

MEAC-S-016A-V1-03-5.0M-30AH
16A 250V AC
IEC 62196-2:2016
IP54
201xxxxx-xxxx

Laser Printing Back Note:

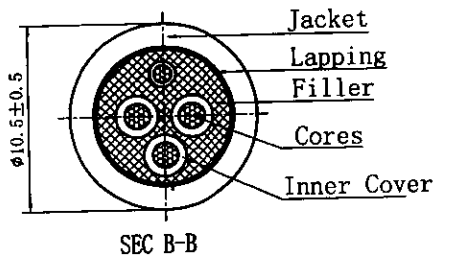

Technical parameters	
Rated voltage	250V AC
Rated current	16A
Temperature range	-30℃~+50℃
Insulate resistance	>5MΩ, 500V DC 1Min
Withstanding voltage	L, N AND PE, 2500V AC 1Min
	L AND N, 2500V AC 1Min
Ingress protection	IP54
The insertion/pullout times	10000 TIMES
Insertion/pullout force	<100N
Reference standard	IEC 62196-2:2016

Customer Drawing

NOTES:
1. Cable: EN50620-2017 EV 3*2.5mm²+1*0.75mm² Black
2. RoHS Compliance

Size Measure Range	. XX	. X	PART NO. : /	NINGBO DEGSON ELECTRICAL CO., LTD	
≤6	±0.05	±0.10	APPD: ZX 2020.1.16	NAME: EV ELECTRIC VEHICLE AND EV POWER SUPPLY (16A three-phase)	
6~30	±0.10	±0.20	CHKD: DT 2020.1.16	MEAC-S-016A-V1P1-03-5.0M-30AH	
30~120	±0.15	±0.30	DRFT: XP LAD 2020-01-16	TITLE: Customer Drawing	REV DO-1
120~400	±0.20	±0.50		DRAWING NO. : /	SHEET 1/1
400~1000	±0.30	±0.80		(INCH)	DO NOT SCALE DRAWING
1000~2000	±0.50	±1.20		SCALE	1:6
Angle Measure Range	. XX	. X	THIRD ANGLE PROJECTION		
	±0.5°	±1.0°			