


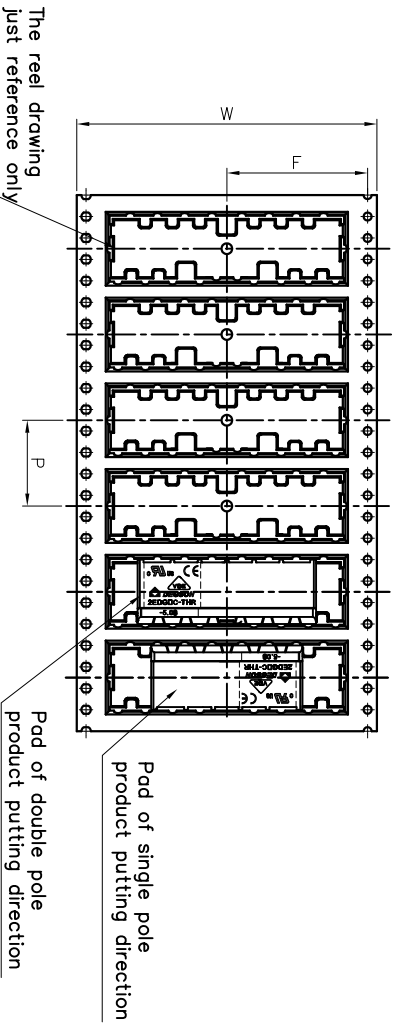
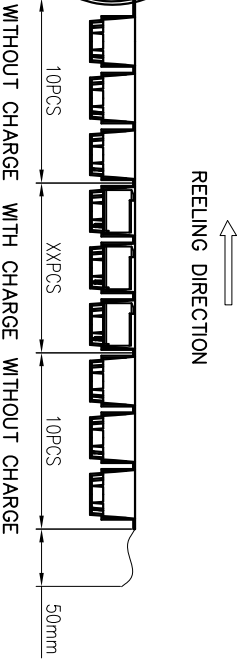



Reel Name	POLE	Width /w	Pitch /P	Width/F	Width/Bo	Qty. per reel	Reel qty. per carton	Qty. per carton
ZEDGRC-THR-5.08-REEL(32)	2~3	32mm	16mm	14.25mm	20.62mm	330	8	2640
ZEDGRC-THR-5.08-REEL(56)	4~8	56mm	16mm	26.25mm	43.72mm	330	5	1650
ZEDGRC-THR-5.08-REEL(88)	9~12	88mm	16mm	42.25mm	71.42mm	240	3	720

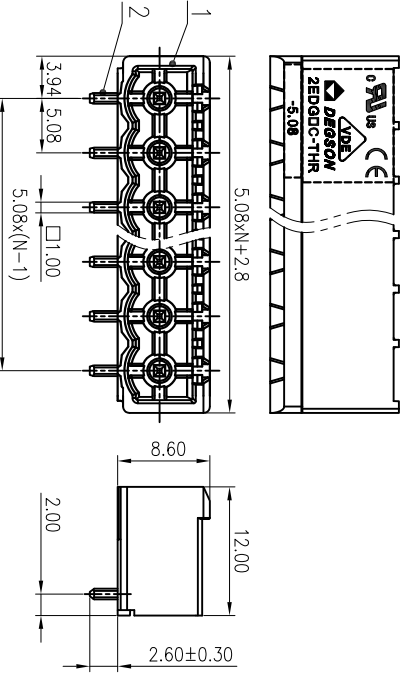

Product drawing

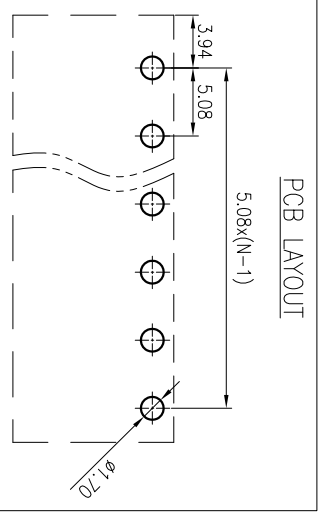

REV	ECN	DESCRIPTION	DRAFT	DATE
12		Change frame	CenSL	2020.06.05
11	17-0015	Design Change	CMZ	2017.02.06

MATERIAL:	
MAT NO.:	
STATUS:	
APPD:	Lan/CH 2020.06.04
CHKD:	GongYzh 2020.06.04
DFT:	WL 2015.08.24
TYPE:	CUSTOMER DRAWING
SCALE:	2:1
SHEET:	1/1

NAME:	NINGBO DEGSON ELECTRICAL CO., LTD	
DRAWING NO.:	ZEDGRC-THR-5.08-C05	
REV:	T2	
DATE:		
SCALE:	2:1	
SHEET:	1/1	

UL Standard:	B	C	D
额定电压/Rated Voltage (V)	300/15	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等	III/3	III/2	II/2
额定电压/电涌/Rated Voltage (V)/Current (A)	320/20	/	/
额定脉冲电压 (KV)/Rate Impulse Voltage (KV)	4	/	/
间距/Pitch (mm)/线数范围/Poles	5.08	N=02~12P	
使用温度范围/Operating temperature (°C)	-40~+130		
符合RoHS环保要求/Conform to RoHS	Yes		

ITEM	NAME OF PART	MATERIAL	NOTES
2	Pin	Copper	
1	Housing	Thermoplastic	UL94V-0

研发中心
2020.06.05
(仅限内部使用, 对外无效)

0	253	28	31.0	31.8	33.0	35.0	38.0	42.0	46.0	50.0	55.0	60.0	65.0	70.0	75.0	80.0	85.0	90.0	95.0	100.0
10	110	120	130	140	150	160	170	180	190	200	210	220	230	240	250	260	270	280	290	300