



未注公差/General tolerances (mm)													0.1/10	
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500		>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in writing by Degson. All rights reserved for patent, utility model or design registrations. 除专利、商标、实用新型、外观设计、发明专利、软件著作权、集成电路布图设计专有权、商业秘密等权利外，其他权利均归德松公司所有。未经许可，不得复制或传播。

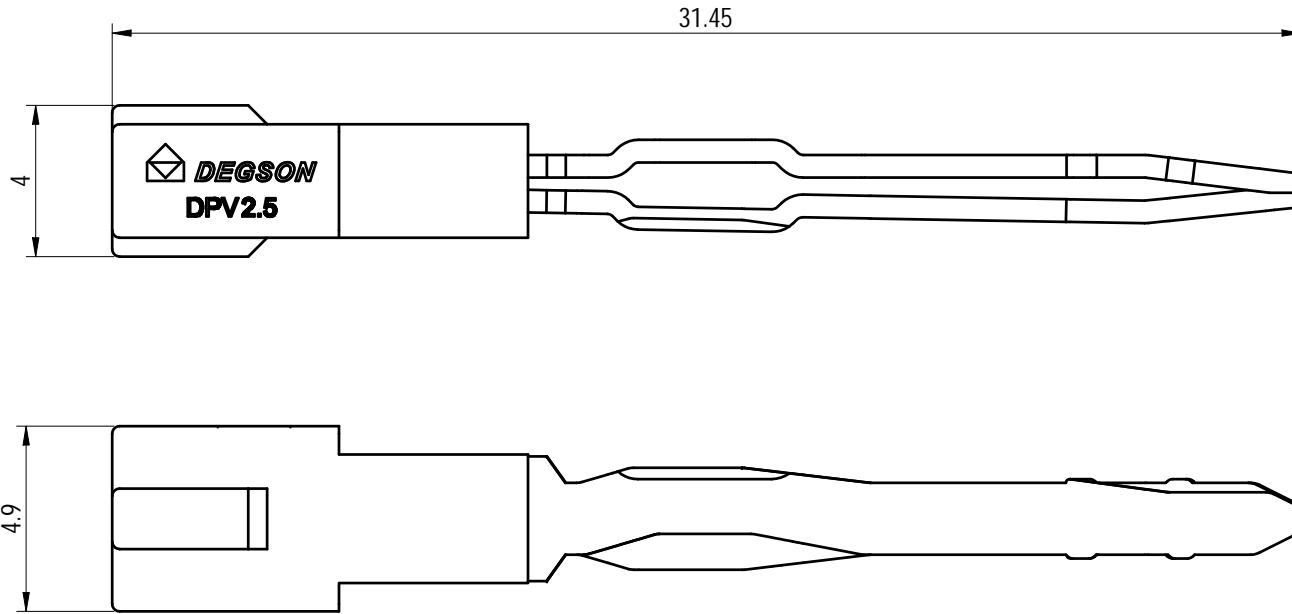

ITEM	NAME OF PART	MATERIAL	NOTES
2	Current carrier	Copper	Sn Plated
1	Housing	PA66	UL94V-0

使用温度范围/Operating temperature(°C)	-40~+105
符合RoHS环保要求/Conform to RoHS	Yes

APPD:	PengM	2022.07.12
CHKD:	GaoWG	2022.07.12
DRFT:	XieXD	2022.07.12

MATERIAL: /	SURFACE/COLOR: /
MAT NO./REV: /	MAT STATUS: /
NAME	
DPV2.5-01P-1Y-00A(H)	

REV	ECN	DESCRIPTION	DRFT	DATE	比例尺
00	/	/	XieXD	2022.07.12	A4

DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
/	CUSTOMER DRAWING	/	5:1	1/1